

Led Linear Track Light

CATALOGUE 2024



RETAIL | WORKSHOP | WAREHOUSE | OFFICE




HONGKONG MONRING STAR LIGHTING INT CO., LTD.
FOSHAN CHENHONG LIGHTING ELECTRICAL APPLICANCE CO., LTD.

F3, Bldg.#3, Jiangmei Industrial Zoon Xiaotang, Shishan Town, Nanhai, Foshan City, China
Tel: +86-757-86636899 81081766
Fax: +86-757-86633577
Homepage: www.cn-starlighting.com
Email: info@cn-starlighting.com

Led Linear Track Light



Dimension

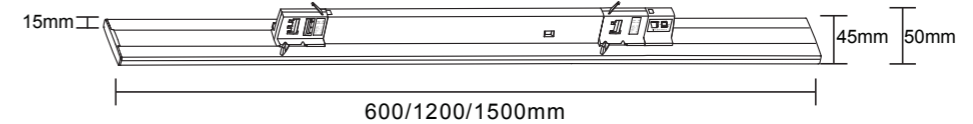

Features


- 15W-30W/40W-55W Power Selectable
- 90° Wide/Double Asymmetric Optic
- Compatible with 4 wires track rail system
- 3000K/4000K/5000K/6000K/6500K or 3CCT changeable
- upto 165lm/w efficiency
- In track conceal led driver
- 15mm thickness ultra thin body
- Swingable at an angle of 30 degrees to the left and right

Specification


Model No.	THTL-45-406-30	THTL-45-412-55	TH-TL-415-55
Dimension	600x45x50mm	1200x45x50mm	1500x45x50mm
Input Voltage	220-240VAC	220-240VAC	220-240VAC
Output Power	15W/20W/25W/30W	40W/45W/50W/55W	40W/45W/50W/55W
(select with Dip Switch)			
Output Current	400mA Max	700mA Max	700mA Max
Frequency	50/60Hz	50/60Hz	50/60Hz
PFC	>0.9	>0.9	>0.9
Lumen	5000lms	8700lms	9000lms
Efficiency	165lms/w	165lms/w	165lms/w
CCT	3000K / 4000K / 5000K / 6000K / 6500K or 3CCT selectable with DIP switch	3000K / 4000K / 5000K / 6000K / 6500K or 3CCT selectable with DIP switch	3000K / 4000K / 5000K / 6000K / 6500K or 3CCT selectable with DIP switch
CRI	Ra>80, 90	Ra>80, 90	Ra>80, 90
Beam Angle	90°,Double Asymmetric	90°,Double Asymmetric	90°,Double Asymmetric
Ripple	<5%	<5%	<5%
Type of Precision	IP20	IP20	IP20
Ta	-25°C- 40°C	-25°C- 40°C	-25°C- 40°C
Storage Temperature	-25°C- 80°C	-25°C- 80°C	-25°C- 80°C
Life Span	50000hours	50000hours	50000hours
Warranty	5 Years	5 Years	5 Years



Led Linear Track Light

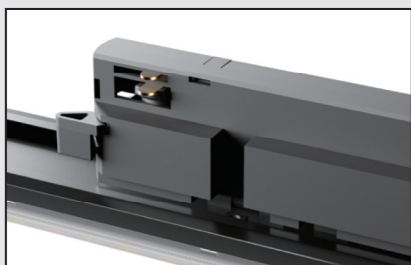

Dimension

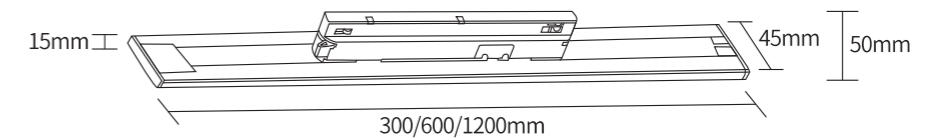

Features

- 90° Wide / Double Asymmetric Optic
- Compatible with 2/3 wires track rail system
- 3000K/4000K/5000K/6000K/6500K or 3CCT changeable
- upto 165lm/w efficiency
- In track conceal led driver
- 15mm thickness ultra thin body
- Swingable at an angle of 30 degrees to the left and right
- 300mm/600mm/1200mm


Specification

Model No.	THTL-45-203-15	THTL-45-206-50	THTL-45-212-50
Dimension	300x45x55mm	600x45x55mm	1200x45x55mm
Input Voltage	220-240VAC	220-240VAC	220-240VAC
Output Power	15W	30W	50W
Power Factor	>0.9	>0.9	>0.9
LED Chip	SMD	SMD	SMD
CRI	>80	>80	>80
System Lumen	2500lms	5000lms	8300lms
Efficiency of Fixture	165lm/w	165lm/w	165m/w
Color Temperature	3000K/4000K/5000K/ 6000K/6500K/3CCT	3000K/4000K/5000K/ 6000K/6500K/3CCT	3000K/4000K/5000K/ 6000K/6500K/3CCT
Beam Angle	90°,Double Asymmetric	90°,Double Asymmetric	90°,Double Asymmetric
Housing Material	Aluminum	Aluminum	Aluminum
Color	White/Black	White/Black	White/Black
Adapter	2wires/3wires	2wires/3wires	2wires/3wires
Control	On/Off	On/Off	On/Off

Led Linear Track Light



Dimension

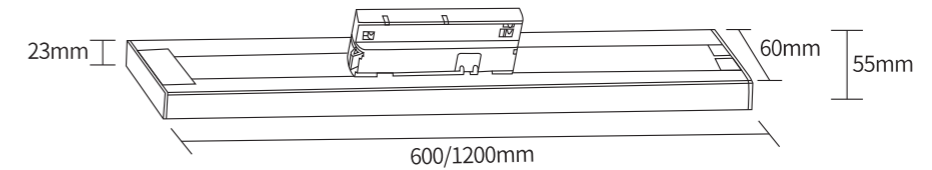


Features

- 90° Wide Optic
- Compatible with 2/3 wires track rail system
- 3000K/4000K/5000K/6000K/6500K
- upto 165lms/w efficiency
- In track conceal led driver
- Swingable at an angle of 30 degrees to the left and right
- 600mm/1200mm

Specification


Model No.	THTL-60-206-30	THTL-60-212-50
Dimension	600x60x55mm	1200x60x55mm
Input Voltage	220-240VAC	220-240VAC
Output Power	30W	50W
Power Factor	>0.9	>0.9
LED Chip	SMD	SMD
CRI	>80	>80
System Lumen	5000lms	8300lms
Efficiency of Fixture	165lm/w	165lm/w
Color Temperature	3000K/4000K/5000K/6000K/6500K	3000K/4000K/5000K/6000K/6500K
Beam Angle	90°	90°
Housing Material	Aluminum	Aluminum
Color	White/Black	White/Black
Adapter	2wires/3wires	2wires/3wires
Control	On/Off	On/Off

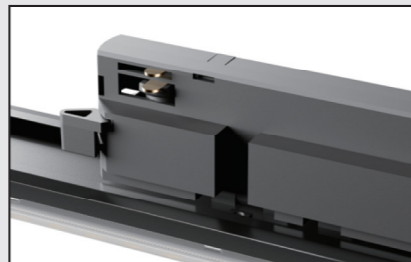

Led Linear Track Light



Dimension

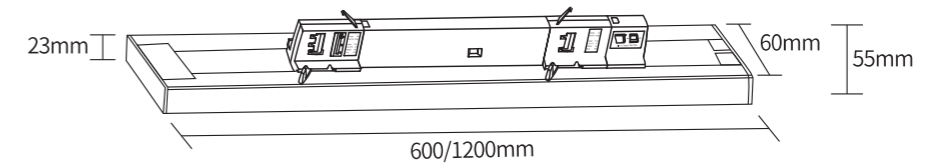

Features



- 90° Wide Optic
- Compatible with 4 wires track rail system
- 3000K/4000K/5000K/6000K/6500K
- upto 170lm/w efficiency
- In track conceal led driver
- Swingable at an angle of 30 degrees to the left and right
- 600mm/1200mm

Specification

Model No.	THTL-60-406-30	THTHL-60-412-55
Dimension	600x60x55mm	1200x60x55mm
Input Voltage	220-240VAC	220-240VAC
Output Power	15W/20W/25W/30W	40W/45W/50W/30W
(Select with dip switch)		
Output Current	400mA Max	700mA Max
Frequency	50/60Hz	50/60Hz
PFC	>0.9	>0.9
Lumen	5100lms	9300lms
LED Chip	SMD	SMD
Efficiency of Fixture	170lm/w	170lm/w
Color Temperature	3000K / 4000K / 5000K / 6000K / 6500K	3000K / 4000K / 5000K / 6000K / 6500K
CRI	>80	>80
Beam Angle	90°	90°
Ripple	<5%	<5%
Type of Protection	IP20	IP20
Ta	-25C° - 40C°	-25C° - 40C°
Storage Temperature	-25C° - 80C°	-25C° - 80C°
Life Span	50000hours	50000hours
Warranty	5 Years	5 Years



Led Linear Track Light

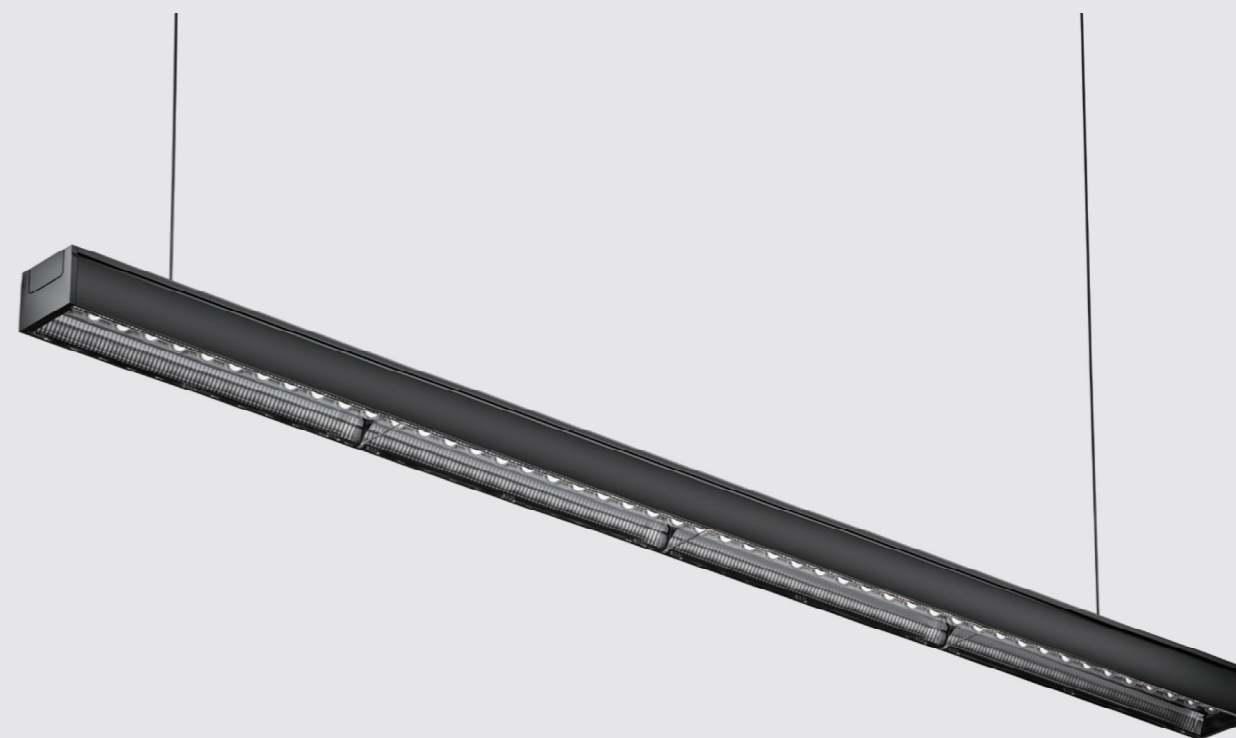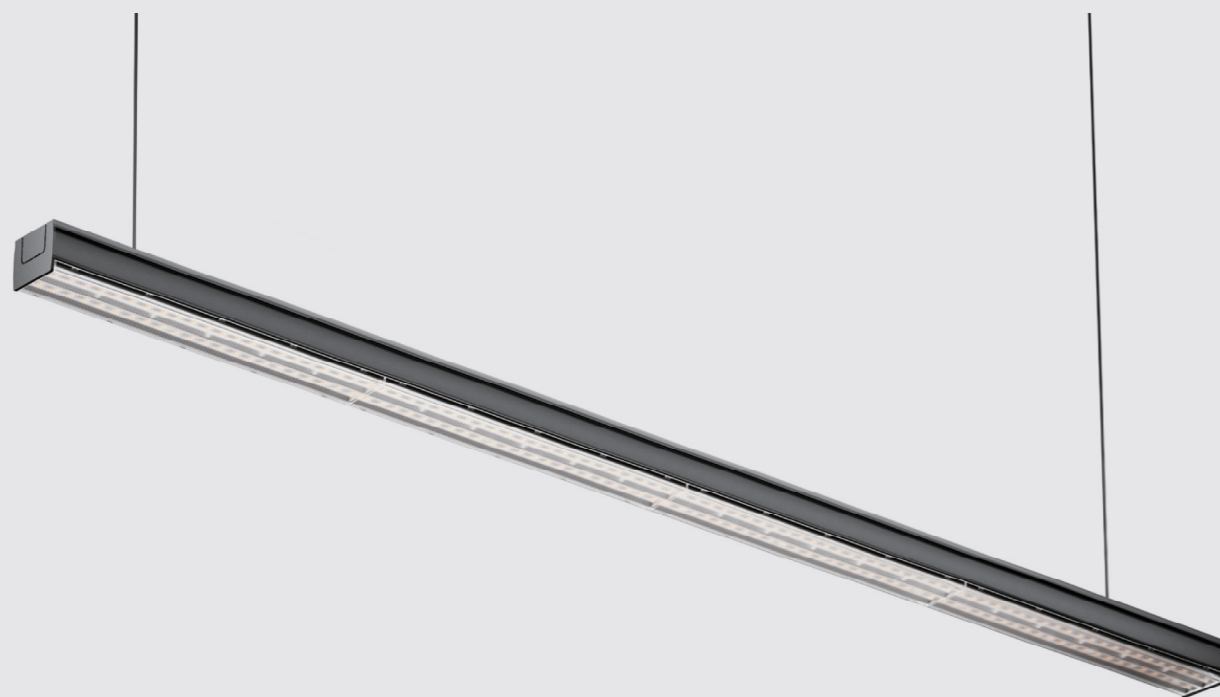

Specification

Model No.	TH-SL-4537-0630	TH-SL-4537-1250	TH-SL-4537-1560
Dimension	600x45x37mm	1200x45x37mm	1500x45x37mm
Input Voltage	220-240VAC	220-240VAC	220-24VAC
Power	30W	50W	60W
Output Current	200mA	350mA	400mA
Frequency	50/60Hz	50/60Hz	50/60Hz
PFC	PF» 0.9	PF» 0.9	PF» 0.9
Lumen	4900lms	8500lms	9900lms
Efficiency	165lm/w	165lm/w	165lm/w
Driver Brand	M-rainbow, Eaglerise, Tridonic	M-rainbow, Eaglerise, Tridonic	M-rainbow, Eaglerise, Tridonic
LED Chip	SMD	SMD	SMD
CRI	Ra>80, 90	Ra>80, 90	Ra>80, 90
Color Temperature	3000K, 4000K, 5000K, 6500K	3000K, 4000K, 5000K, 6500K	3000K, 4000K, 5000K, 6500K
Beam Angle	90°, 120°, Double Assesmetric	90°, 120°, Double Assesmetric	90°, 120°, Double Assesmetric
Type of Protection	Class II	Class II	Class II
Installation	Surface mounted, Suspension	Surface mounted, Suspension	
Life Span	50000Hours	50000Hours	50000Hours
Warranty	3-5years	3-5years	3-5years

Specification

Model No.	TH-SL-6045-0630	TH-SL-6045-1250
Dimension	600x60x45mm	1200x60x45
Input Voltage	220-240VAC	220-24VAC
Power	30W	50W
Output Current	350mA	350mA
Frequency	50/60Hz	50/60Hz
PFC	PF» 0.9	PF» 0.9
Lumen	5100lms	8500lms
Efficiency	170lm/w	170lm/w
Driver Brand	M-rainbow, Eaglerise, Tridonic	M-rainbow, Eaglerise, Tridonic
LED Chip	SMD	SMD
CRI	Ra>80, 90	Ra>80, 90
Color Temperature	3000K, 4000K, 5000K, 6500K	3000K, 4000K, 5000K, 6500K
Beam Angle	90°	90°
Type of Protection	Class II	Class II
Installation	Surface mounted, Suspension	Surface mounted, Suspension
Life Span	50000Hours	50000Hours
Warranty	3-5years	3-5years